




X15

Marine Propulsion and Auxiliary Engines for Commercial and Recreational Applications

General Specifications

Configuration	In-line, 6-cylinder, 4-stroke diesel
Aspiration	Turbocharged / Aftercooled
Displacement	14.9 L (912 in ³)
Bore & Stroke	137 X 169 mm (5.39 X 6.65 in)
Rotation	Counterclockwise facing flywheel
Fuel System	Cummins XPI Fuel System

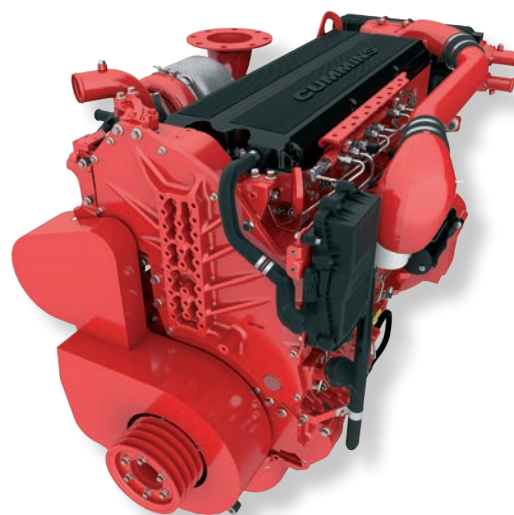

Product Dimensions and Weight

Overall Length	mm (in)	1810.0	(71.20)
Length of Block	mm (in)	1052.0	(41.40)
Overall Width	mm (in)	1120.0	(44.10)
Overall Height	mm (in)	1316.0	(51.80)
Weight	kg (lb)	1814	(4000)

Dimensions and weight may vary based on selected engine configuration.

Power Ratings

Engine Model	Output Power			Engine Speed RPM	Rating Definition	Fuel Consumption		Emissions		
	kW	MHP	BHP			Rated Speed L/hr (gal/hr)	ISO* L/hr (gal/hr)	IMO	EPA	EU
Variable Speed										
X15	336	456	450	1800	CON	87.2 (23.0)	60.7 (16.0)	II	3	3a
X15	336	456	450	1800	CON	82.0 (21.7)	56.5 (14.9)	II	-	-
X15	373	507	500	1800	CON	95.9 (25.3)	66.7 (17.6)	II	3	3a
X15	373	507	500	1800	CON	91 (24.0)	62.4 (16.5)	II	-	-
X15	429	583	575	1800	CON	113 (29.8)	77.2 (20.4)	II	3	3a
X15	447	608	600	1800	CON	109.7 (29.0)	74.0 (19.5)	II	-	-
Fixed Speed										
X15	373	507	500	1500 (50Hz)	Prime	88.9 (23.5)	45.1 (11.9)	II	-	3a
X15	373	507	500	1800 (60Hz)	Prime	99.3 (26.2)	45.7 (12.1)	-	3	3a
X15	425	578	570	1800 (60Hz)	Prime	103.9 (27.5)	52.7 (13.9)	II	-	-

* Average fuel consumption based on ISO 8178 E3 Standard Test Cycle (variable speed models) and ISO 8178 D2 Standard Test Cycle (fixed speed models)

X15

Marine Propulsion and Auxiliary Engines for Commercial and Recreational Applications

Features and Benefits

Engine Design – Robust engine block designed for continuous duty operation and long life. Single cylinder head with four valves per cylinder enhances performance. Base engine design has been in the market for over 15 years.

Fuel System – Cummins XPI Fuel System, High Pressure Common Rail

Lubrication System – Cast aluminum oil pan designed to resist corrosion, spin-on Fleetguard oil filters


Cooling System – Front mount and low profile Heat exchanger or Keel cool with one loop system and high flow pump

Air Intake System – Cummins Turbo Technologies HX60 turbocharger optimized for marine applications

Exhaust System – Dry exhaust manifold to deliver improved fuel economy

Electrical System – 24v system with marine grade wiring harness and instrument panels

Electronics – Cummins Engine Control Module CM2350 provides engine protection through de-rates and automated engine shutdown to prevent catastrophic failures. CM2350 also provides fuel sensor monitoring, gear pressure and temperature as well as digital engine start/stop functionality. Available 24V system and standard marine grade wiring harness.

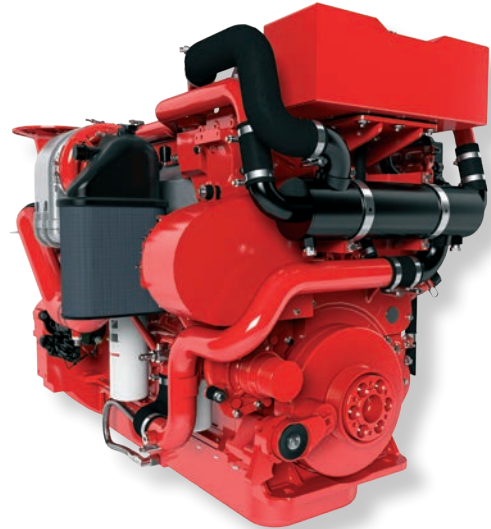

Certifications – Complies with U.S. EPA Tier 3, EU Stage 3a and IMO Tier II emissions regulations

Optional Equipment

- C Command Connect available or open architecture
- Flywheel housing: SAE0
- Vessel System Integration: ED-4 displays—rudder position, fuel level, ONAN Gen Set information
- Hydraulic Pump Drive: SAE B flanges
- Front PTO available



Cummins Inc.
4500 Leeds Avenue – Suite 301
Charleston, SC 29405-8539
U.S.A.

marine.cummins.com

Bulletin 5544046 Rev. 11/18
©2018 Cummins Inc.